

N410/N610 Scan Box Manual

CS Tech Team

※ Manual Order Setting required (error occurs if not set in order)


1.	Machine Setting In Machine	-----	2p
	1) SD Card Format	-----	2p
	2) SD Card Mounting Setting	-----	3p
	3) Box Activation Setting	-----	3p
	4) Box Activation Check	-----	4p
2.	Register/Edit/Deletion Box In Machine	-----	5p
3.	Box Setting in Machine	-----	6p
4.	How to use Box Scan in Machine	-----	7p
5.	How to use Scan Box Link In PC	-----	8p
	1) Installation	-----	8p
	2) Public Box usage	-----	9p
	3) Box Creation and File Deletion	-----	10p

1. Machine Setting in Machine


1) SD Card Format



Power Off and remove the left cover
→ insert the microSD and Power ON

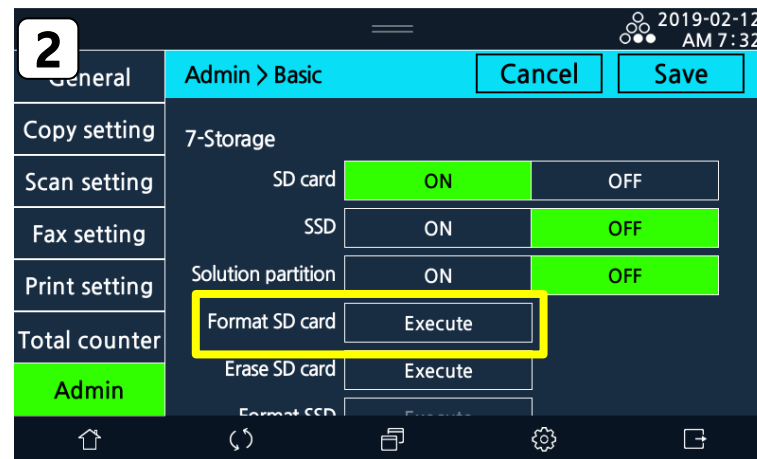


Press the below menu
[Setting]-[Admin]-[Basic]-[Format SD Card] -[Execute]

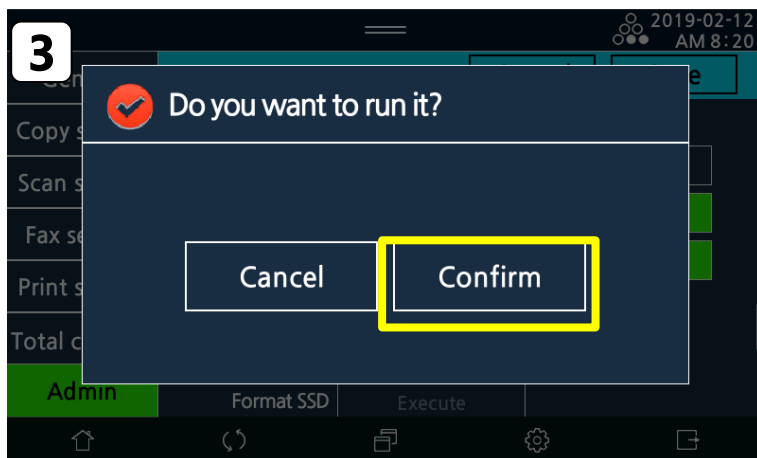



Press the "confirm"
Power Off/On automatically

1. Machine Setting in Machine

2) SD Card Mounting Setting



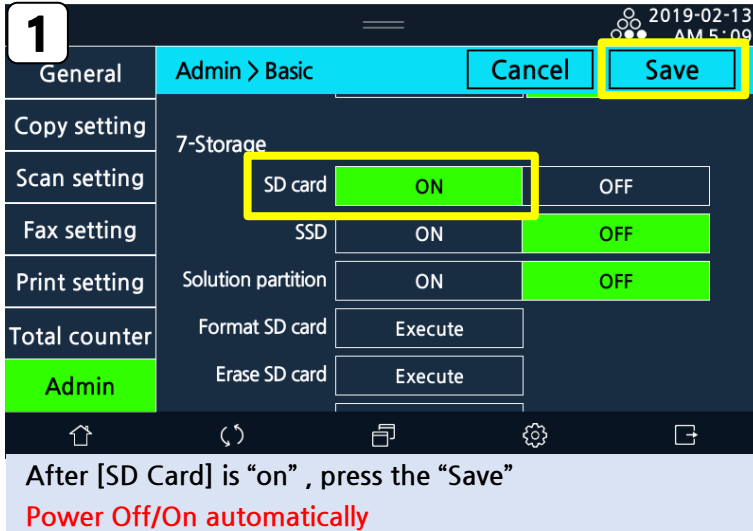


3) Box Activation Setting

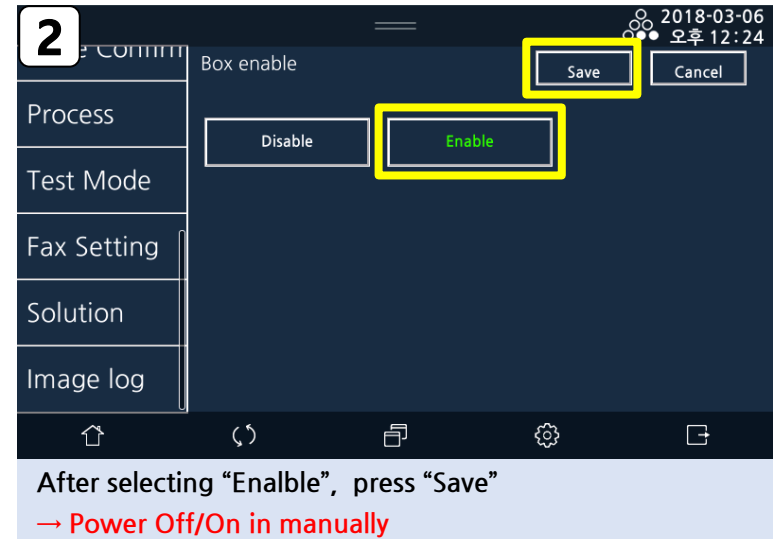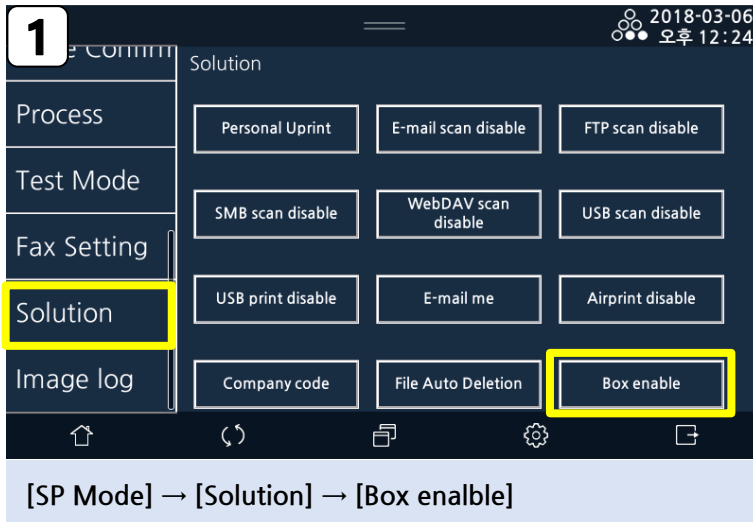


1. Machine Setting in Machine


4) Box activation Check

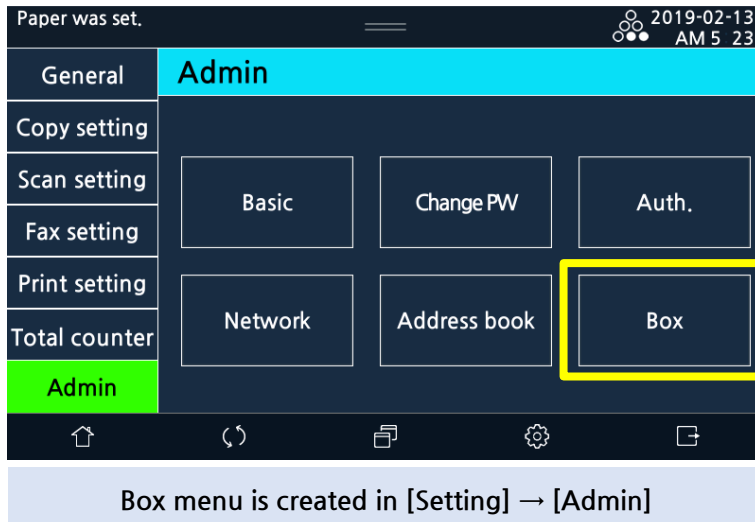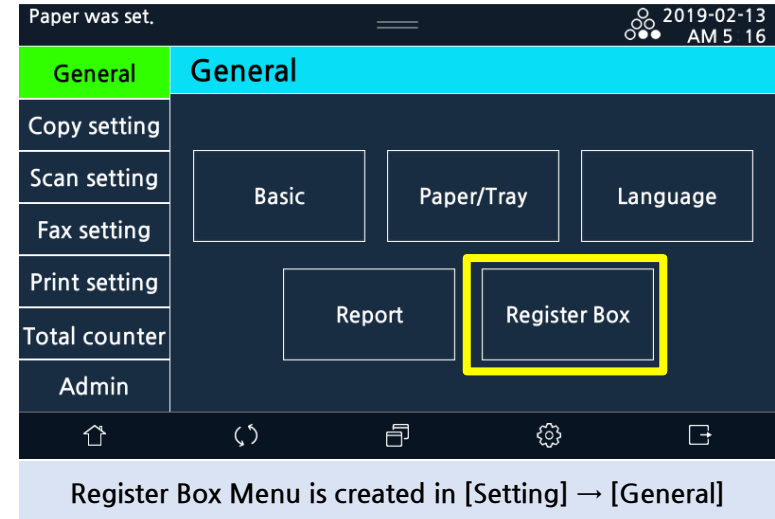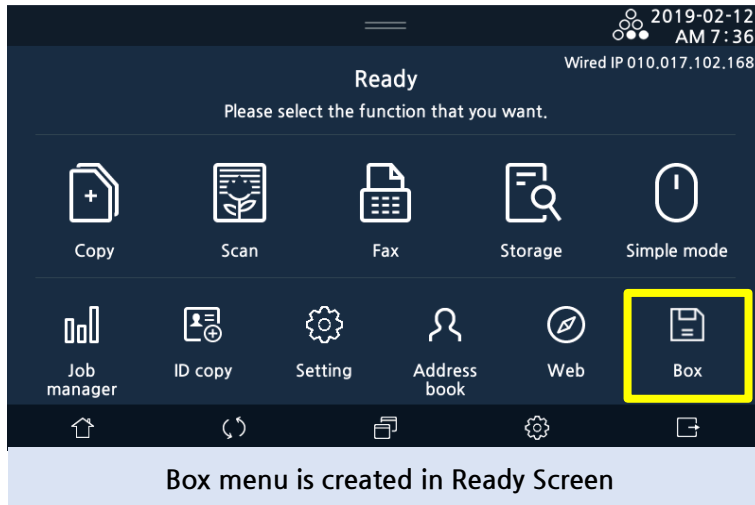


2. Register/ Edit/Deletion Box in Machine

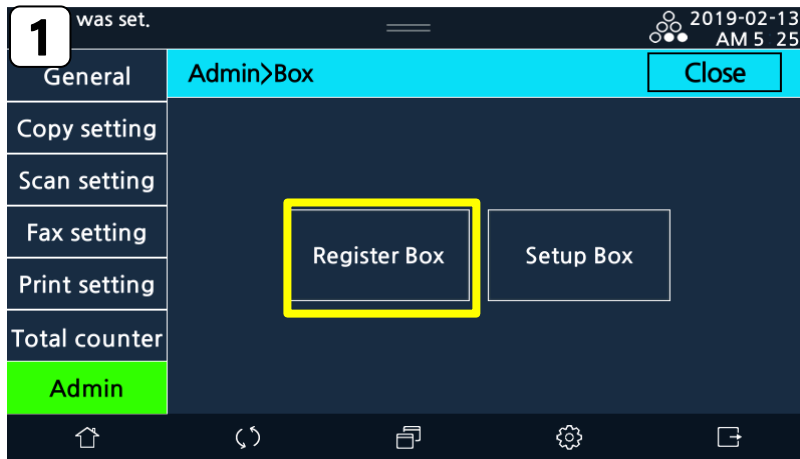


[Admin] → [Box] → [Register Box] Selection

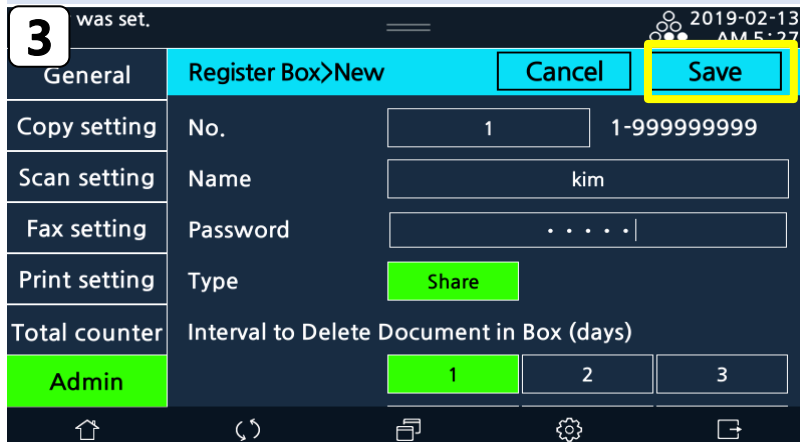

No : Automatic assignment(default), changeable
 Name : input the box name
 Password : No input>Password is not needed when connecting box
 Input>Password is not needed when connecting box
 Interval to Delete Document in Box : 1/2/3/7/30 Days/Keep
 (Keep : No Deletion)

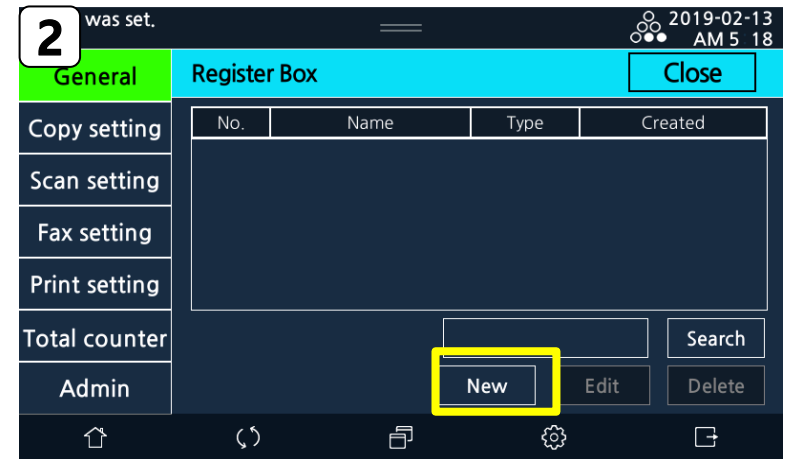


Select the "New"

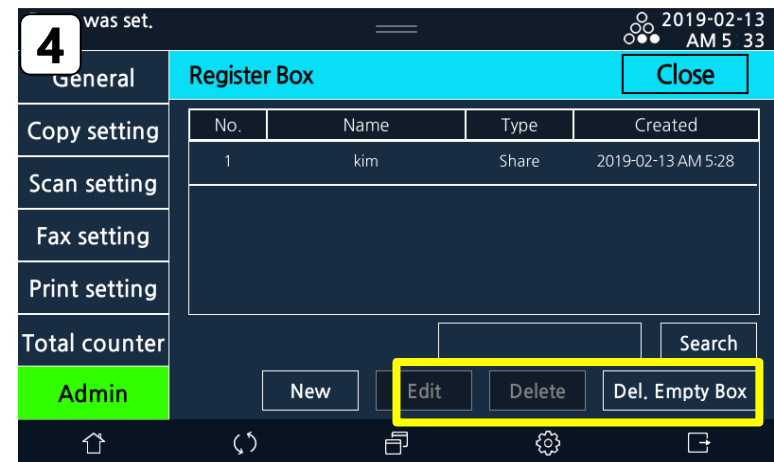


Box Edit/Deletion
 "Del Empty Box" : documentless box Deleted
 [Only for administrator]

(※ Box Register/Edit/Deletion can [Setting]-[General]-[Register Box])


3. Box Setting in Machine

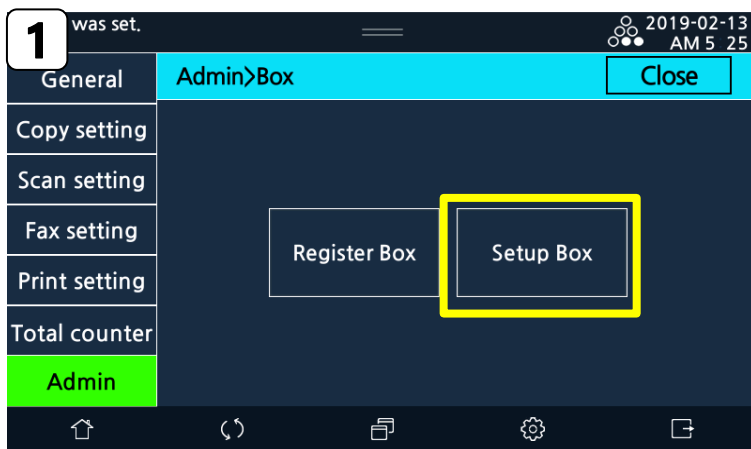

[Admin] → [Box] → [Setup Box] Selection

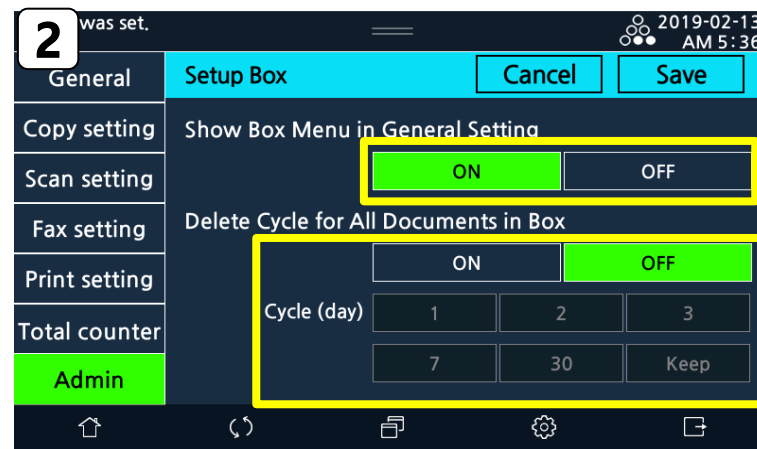


- 1) Show Box Menu in General Setting: ON/OFF
- 2) Delete Cycle for All Documents in Box

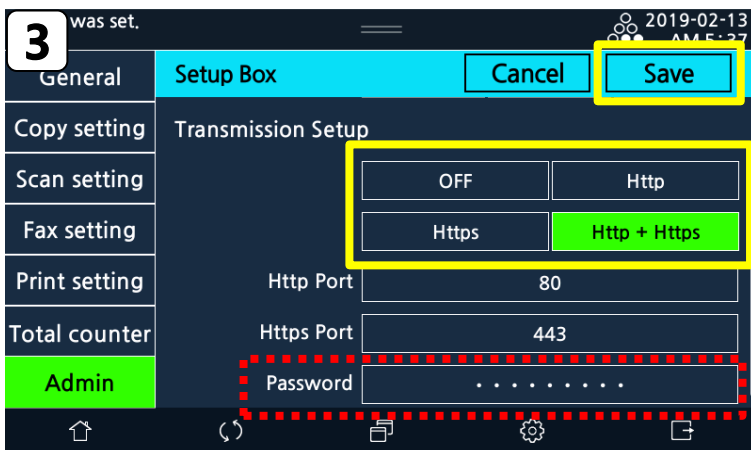


Select the Transmission Setup
(Http, Https, Http+Https) and Save
※ No password change required
(If it change, "Scan Box Link" can not be used)


4. How to use Box Scan in Machine

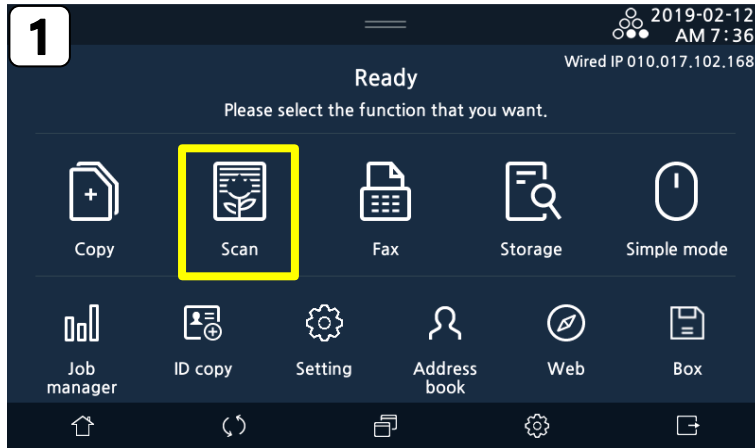


Select the "Scan" Menu

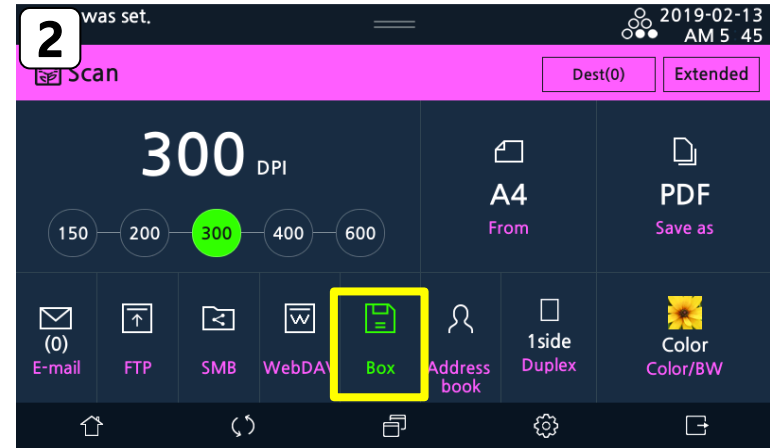

Select the "Box" Menu

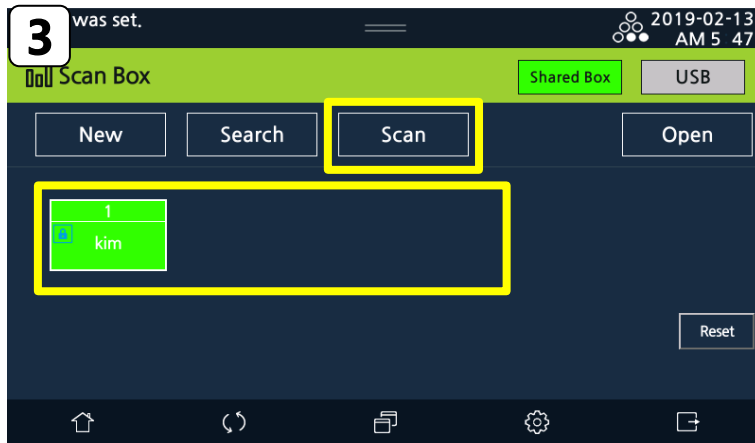







Select the box you want to save(duplicate selectable)
And press the :Scan" menu

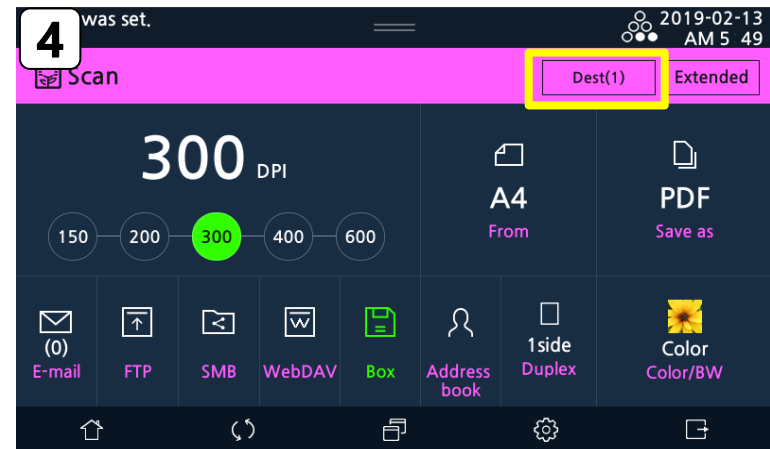

After checking the "Destination", press the start key
→ Scan completed


5. How to use Scan Box Link in PC

1) Installation
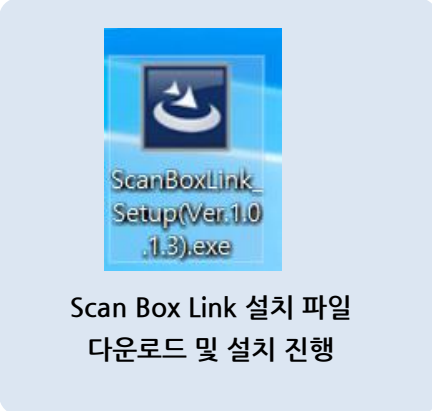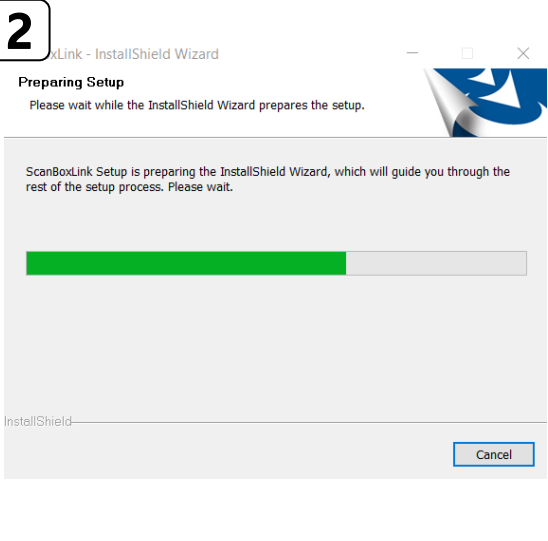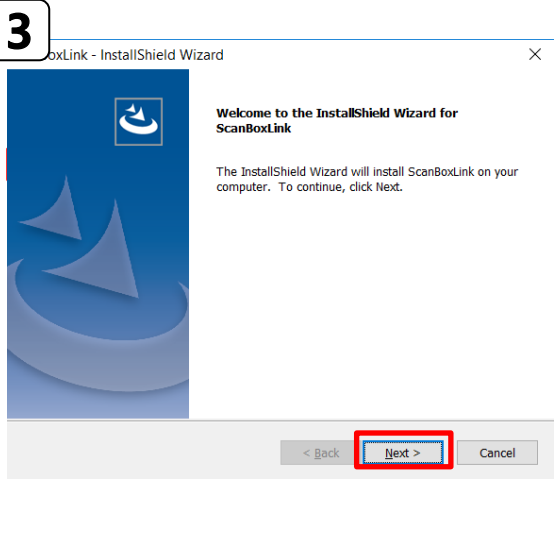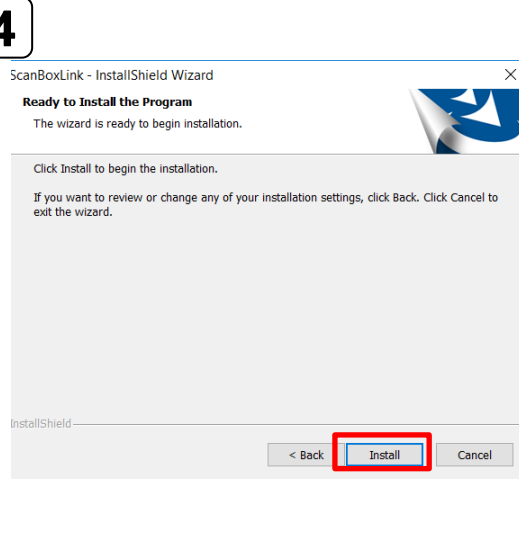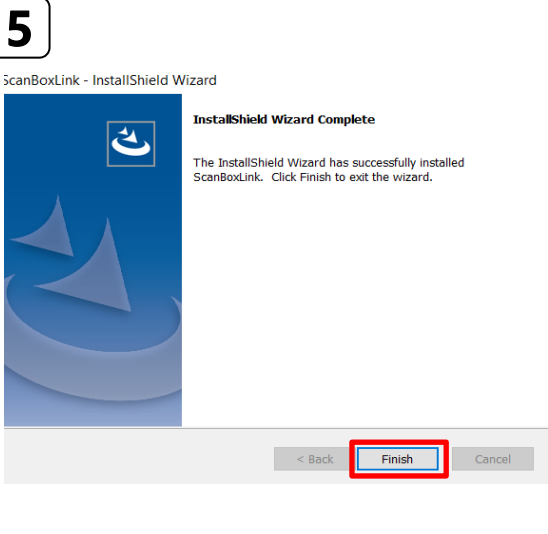
<p>1</p>  <p>Scan Box Link 설치 파일 다운로드 및 설치 진행</p>	<p>2</p>  <p>ScanBoxLink - InstallShield Wizard Preparing Setup Please wait while the InstallShield Wizard prepares the setup.</p> <p>ScanBoxLink Setup is preparing the InstallShield Wizard, which will guide you through the rest of the setup process. Please wait.</p> <p>InstallShield <input type="button" value="Cancel"/></p>	<p>3</p>  <p>ScanBoxLink - InstallShield Wizard Welcome to the InstallShield Wizard for ScanBoxLink</p> <p>The InstallShield Wizard will install ScanBoxLink on your computer. To continue, click Next.</p> <p><input type="button" value="Back"/> <input type="button" value="Next >"/> <input type="button" value="Cancel"/></p>
<p>4</p>  <p>ScanBoxLink - InstallShield Wizard Ready to Install the Program The wizard is ready to begin installation.</p> <p>Click Install to begin the installation.</p> <p>If you want to review or change any of your installation settings, click Back. Click Cancel to exit the wizard.</p> <p>InstallShield <input type="button" value="Back"/> <input type="button" value="Install"/> <input type="button" value="Cancel"/></p>	<p>5</p>  <p>ScanBoxLink - InstallShield Wizard InstallShield Wizard Complete</p> <p>The InstallShield Wizard has successfully installed ScanBoxLink. Click Finish to exit the wizard.</p> <p><input type="button" value="Back"/> <input type="button" value="Finish"/> <input type="button" value="Cancel"/></p>	<p>6</p>  <p>ScanBoxLink.exe</p>

5. How to use Scan Box Link in PC

2) Public Box usage

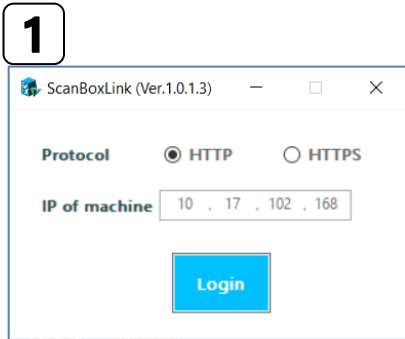

1. Select Protocol
2. Enter IP of machine
3. Click login button


General Box	<p>2 Select the box</p> <table border="1"><thead><tr><th>Name</th><th>Date Modified</th><th>Type</th></tr></thead><tbody><tr><td>123</td><td>1/29/2019 2:16:39 AM</td><td>Public Box</td></tr></tbody></table>	Name	Date Modified	Type	123	1/29/2019 2:16:39 AM	Public Box	<p>3 Scan file download</p> <p>Download Folder Change</p> <p>Download complete.</p> <p>※ It can be download by double click</p>
	Name	Date Modified	Type					
123	1/29/2019 2:16:39 AM	Public Box						
Security Box	<p>2 Select the box and input the password</p> <p>Box Password</p> <p>Input box password.</p> <p>OK Cancel</p>	<p>3 Scan file download</p> <p>Download Folder Change</p> <p>Download Files</p> <p>Are you sure you want to download selected file(s)? 20190128_225057.pdf</p> <p>Yes No</p> <p>※ It can be download by double click</p>						

5. How to use Scan Box Link in PC

3) Box creation & File Deletion

1 Box Creation

General Box

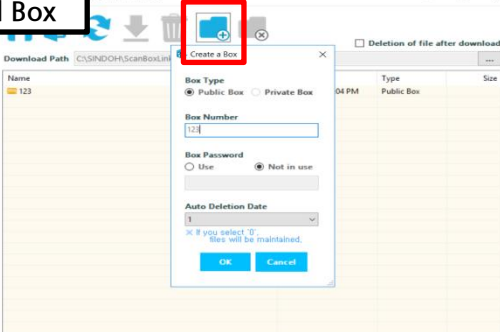


Box Type: Public Box Private Box

Box Number: 123

Box Password: Use Not in use

Auto Deletion Date: 1

Security Box (Password Setting)

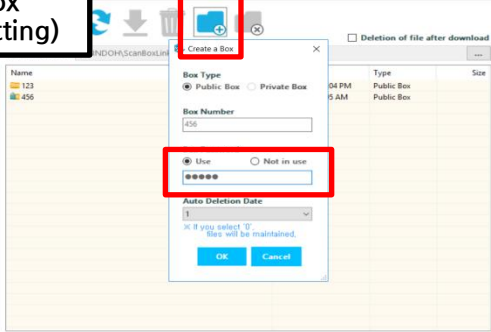


Box Type: Public Box Private Box

Box Number: 456

Box Password: Use Not in use

Auto Deletion Date: 1

2 Box Deletion

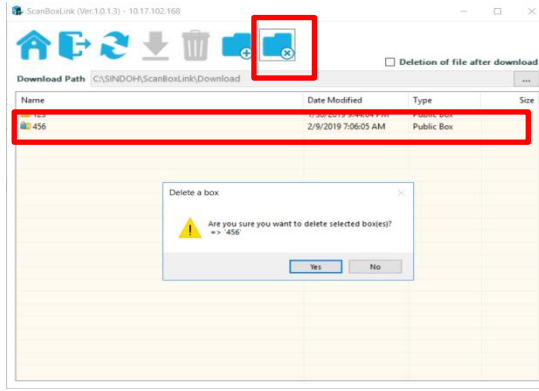

Download Path: C:\SINDOH\ScanBoxLink\Download


Name	Date Modified	Type	Size
123	2/9/2019 7:06:05 AM	Public Box	
456	2/9/2019 7:06:05 AM	Public Box	

Delete a box

Are you sure you want to delete selected boxes?
=> 456

Yes No

3 File Deletion

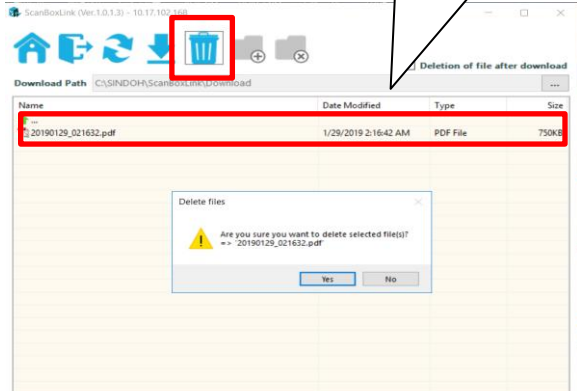

Download Path: C:\SINDOH\ScanBoxLink\Download

Name	Date Modified	Type	Size
20190129_021632.pdf	1/29/2019 2:16:42 AM	PDF File	750KB

Delete files

Are you sure you want to delete selected file(s)?
=> 20190129_021632.pdf

Yes No

Check "V"
Deletion of file after download