



N410 / N610

User Quota Count/ Group Quota Count Setting Method

2019. 03. 25

CS tech dept.

User Quota Count

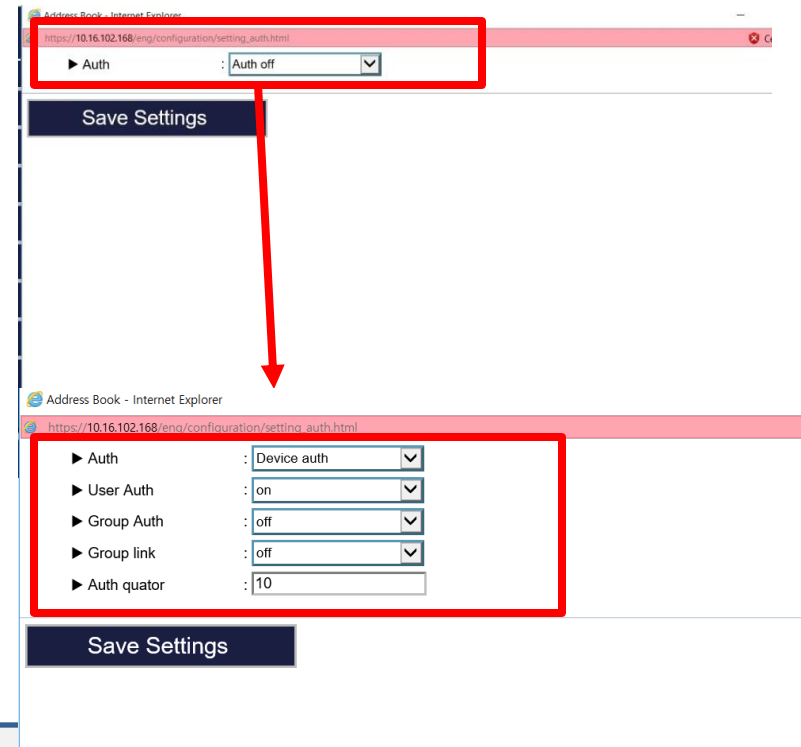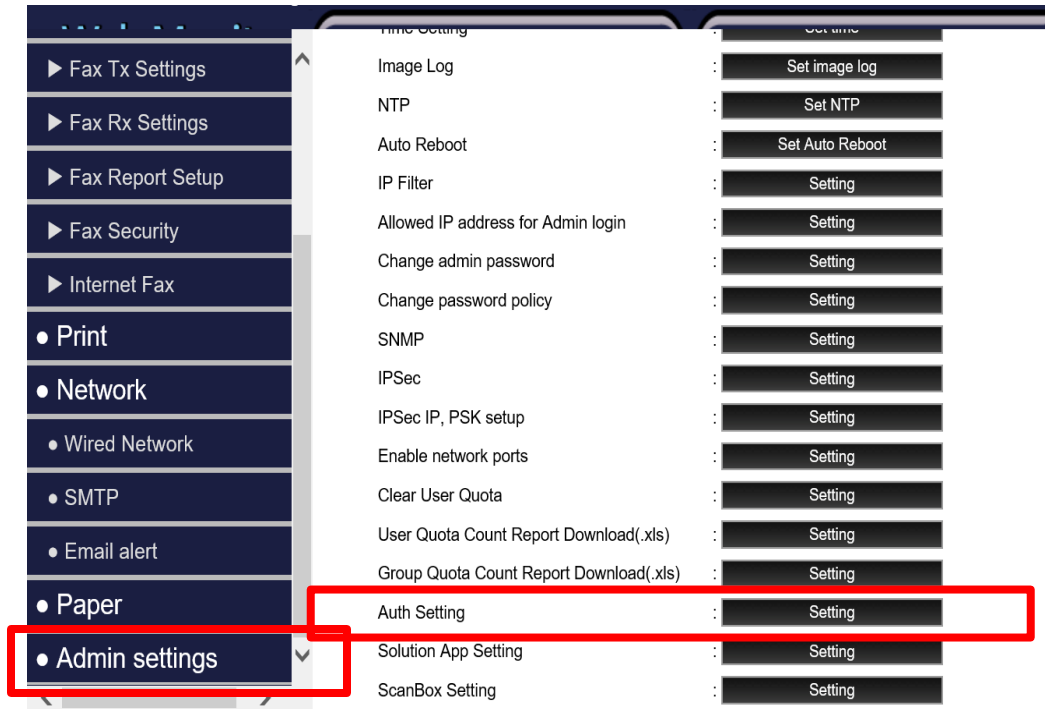

1. Enter the web Monitor (enter the machine IP in web)
2. Do the login (defaults value: admin / sindoh#123)
3. Click the Admin setting and Auth Setting
4. Change the “Auth off” to “Device auth” in auth setting and User Auth is “on”
5. Input the setting value .(Auth/User Auth/Group Auth/ Group link Auth quator)
6. Click the “Save Setting”

※ If you are setted “10” in auth quator, Up to 10 users can be registered.

※ Defaults value for “Group Auth” is on. So, if you do not use “Group Auth” , it must set “off”

Address Book - Internet Explorer

https://10.16.102.168/eng/configuration/setting_auth.html

▶ Auth	:	Device auth	▼
▶ User Auth	:	on	▼
▶ Group Auth	:	off	▼
▶ Group link	:	off	▼
▶ Auth quator	:	10	

Save Settings

웹 페이지 메시지



확인

Address Book - Internet Explorer

https://10.16.102.168/eng/configuration/setting_auth.html

▶ Auth	:	Device auth	▼
▶ User Auth	:	on	▼
▶ Group Auth	:	off	▼
▶ Group link	:	off	▼
▶ Auth quator	:	10	

Save Settings



웹 페이지 메시지

? this setting will be applied after reboot.

확인

취소

7. If you click to save setting, it showed the “setting success”, then click the “OK”
8. Then you will show “this setting will be applied after reboot.”, then click the “OK” then machine will reboot.

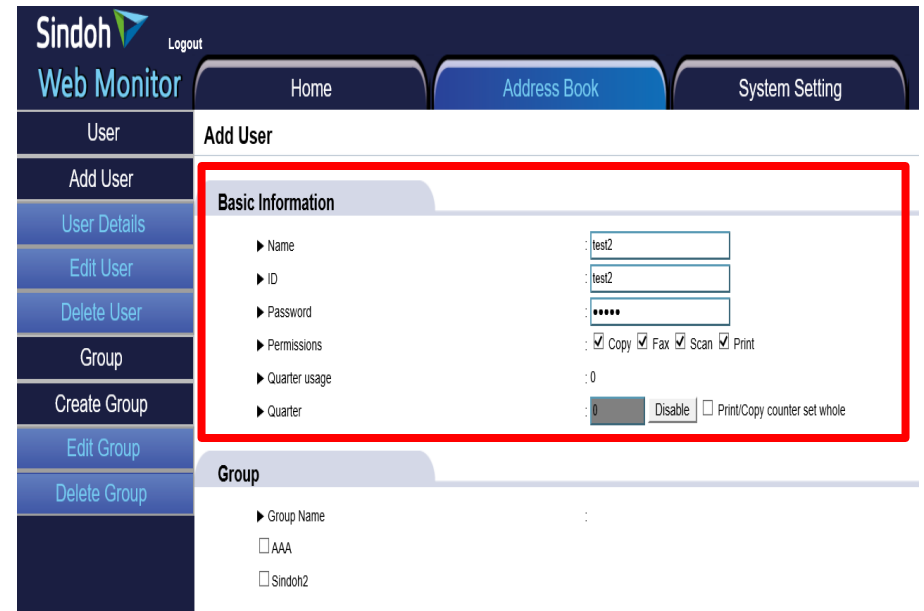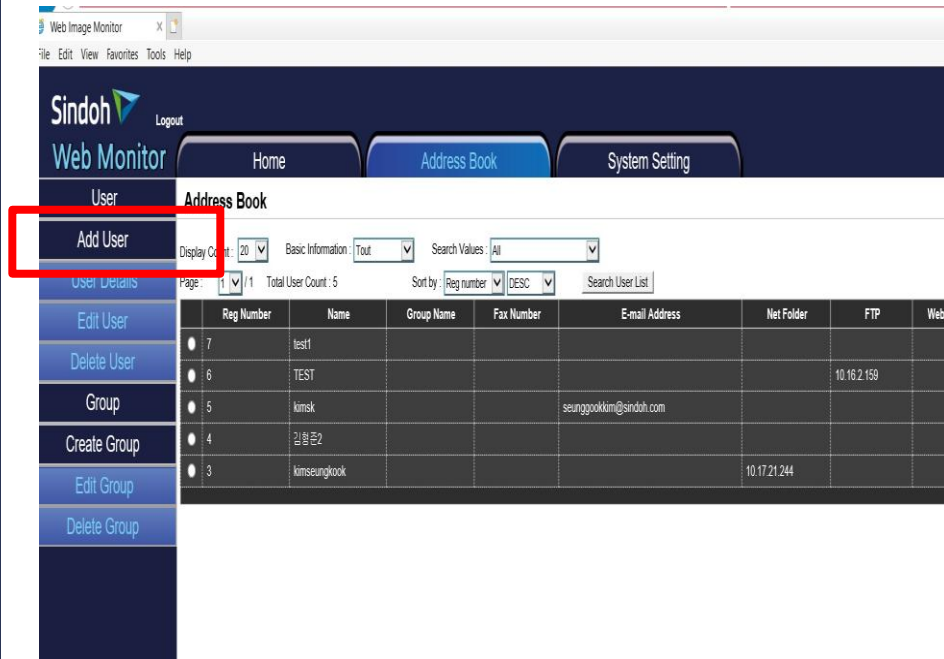

9. Enter the web monitor and log in
10. Click the address book and add user.
11. Input the setting value in the Basic information.
(If you don't want to limit usage, press the "disable" in the quarter.)

The screenshot shows a configuration form with the following sections and fields:



- SMB:** SMB Port Number, SMB ID, SMB Password.
- FTP:** FTP Server, FTP Path, FTP Port Number, FTP ID, FTP Password.
- WebDAV:** WebDAV Server, WebDAV Path, WebDAV Port Number, WebDAV ID, WebDAV Password.
- Fax:** Fax Number, Speed Dial Number, Duplicate Check.

Buttons: Add (highlighted), Cancel.


The screenshot shows the 'Address Book' page with the following table:

Reg Number	Name	Group Name	Fax Number	E-mail Address	Net Folder	FTP	WebDA
8	test2						
7	test1						
6	TEST				10.16.2.159		
5	kmsk			seunggookim@sindoh.com			
4	김철민2						
3	kimsungook				10.17.21.244		

12. Click the “ADD” and you will show to add setted user in address book.

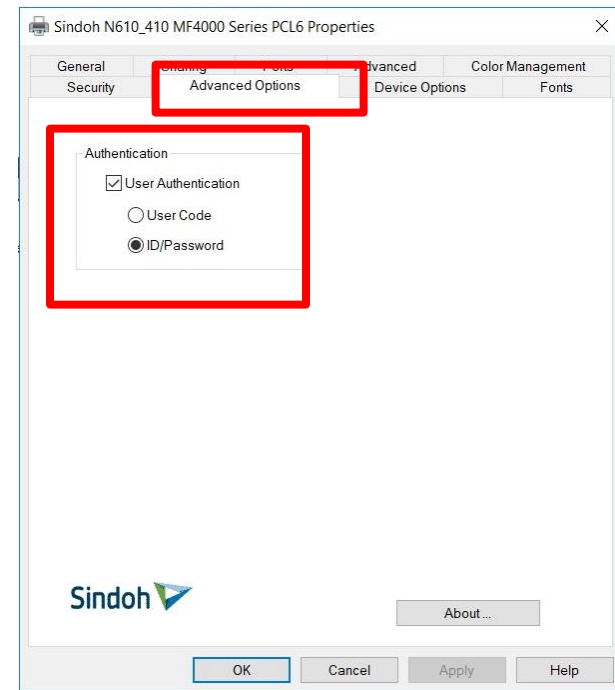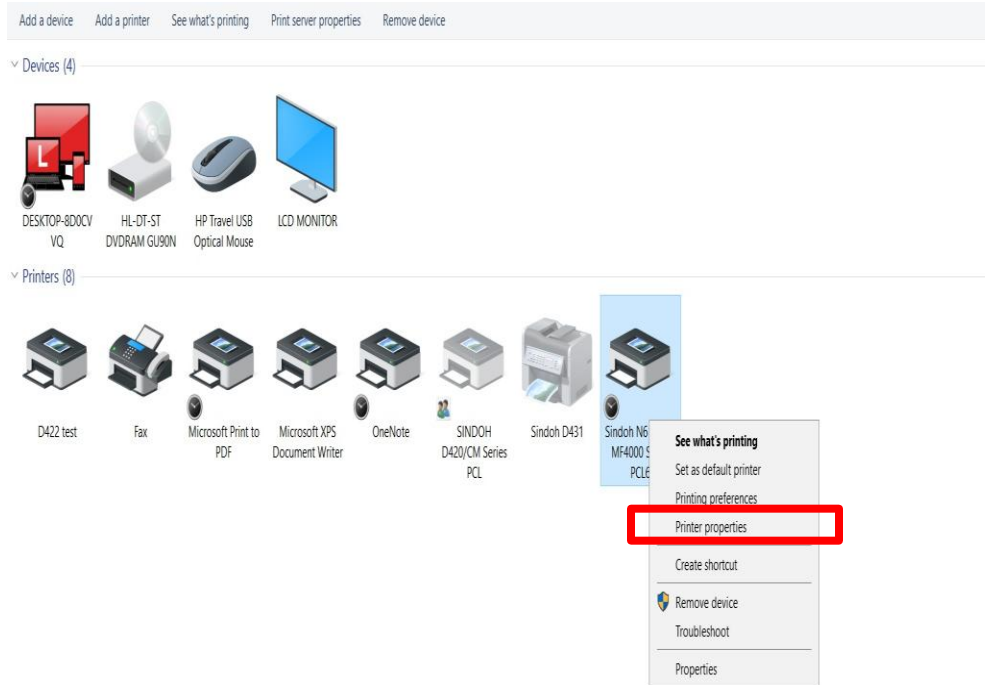

13. Click the printer properties in N610/N410 Driver(control pannel → Device and printers)
14. Choice the ID /Password in Advanced Options.


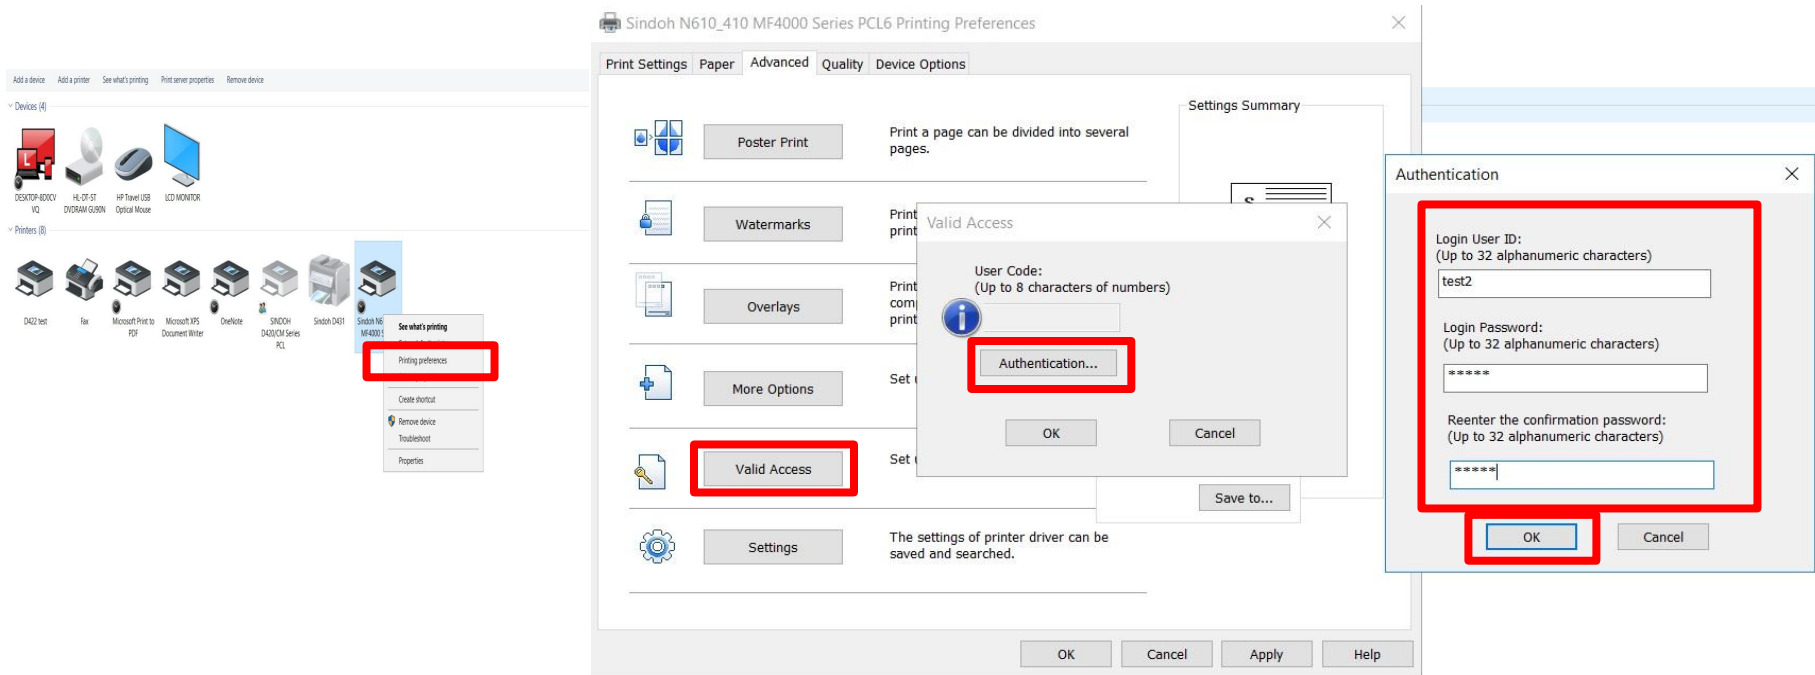


15. Click the printer preference in N610/N410 Driver(control panel → Device and printers)
16. Click the Valid Access in Advanced Tab
17. Click the Authentication
18. Input the previous setting value(added user)

The screenshot shows the Sindoh Web Monitor interface. On the left is a navigation menu with categories: General, Copy, Scan, Fax, Print, Network, Paper, and Admin settings. The 'Admin settings' menu item is selected. The main content area is titled 'Admin settings' and lists various configuration options. Two options are highlighted with red boxes: 'Clear User Quota' and 'User Quota Count Report Download(.xls)'. An inset browser window shows a table of user quota counts. The table has columns for RegNo, ID, Copy/Print Quota, Copy/Print limit, Total Print Quota, Total Copy Quota, and Total Scan Quota. The row for RegNo 8 and ID test2 is highlighted with a red box.



RegNo	ID	Copy/Print Quota	Copy/Print limit	Total Print Quota	Total Copy Quota	Total Scan Quota
6	test	13	0	21	0	0
7	test1	0	0	0	0	0
8	test2	0	0	0	0	0

19. It will be showed values for “User Quota Count Report(Download(.xls)” in Web Monitor

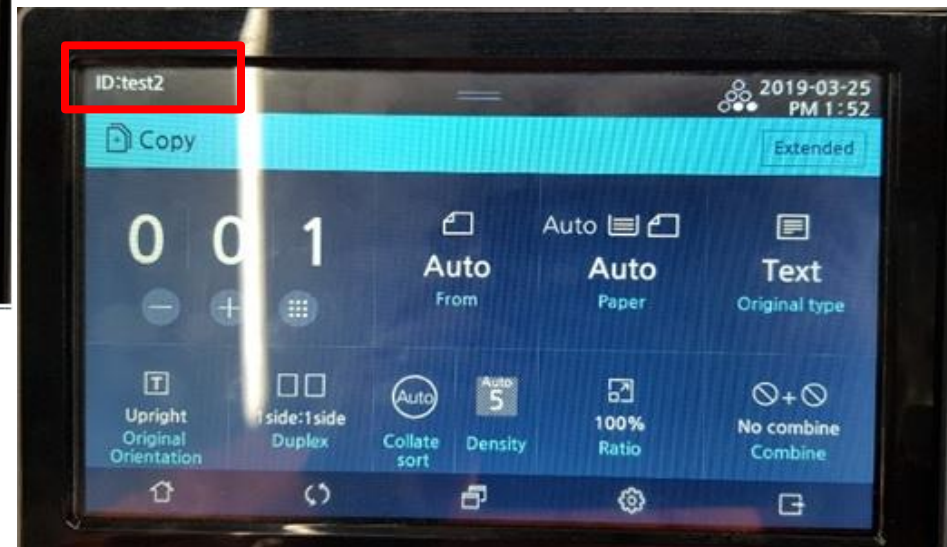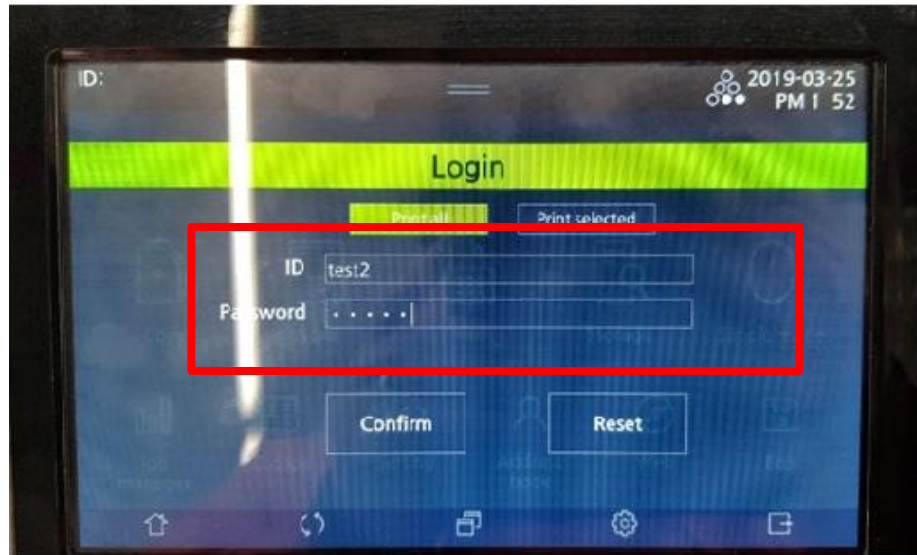


20. If you want to check copy and scan individually, you must log - in (setted user)
(In that case of printing, you were previous setting for driver. So it donot need and it count automatically)

※ How to log out

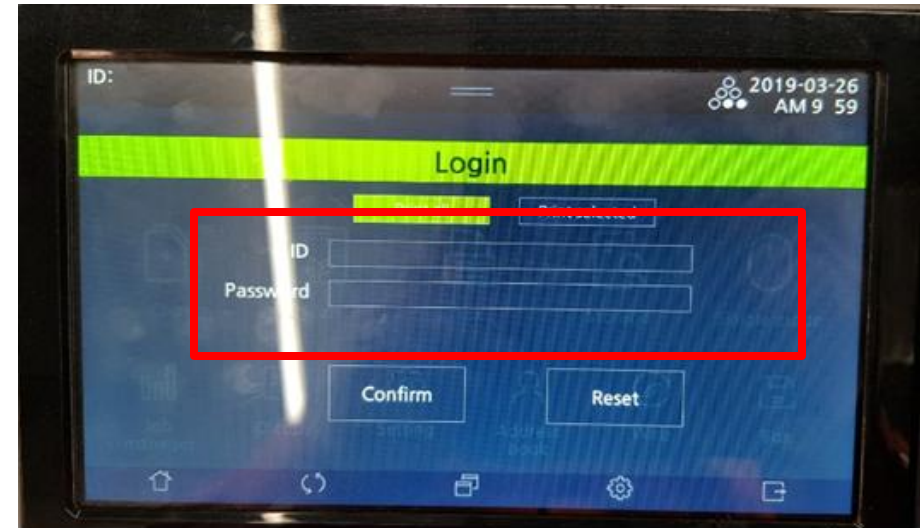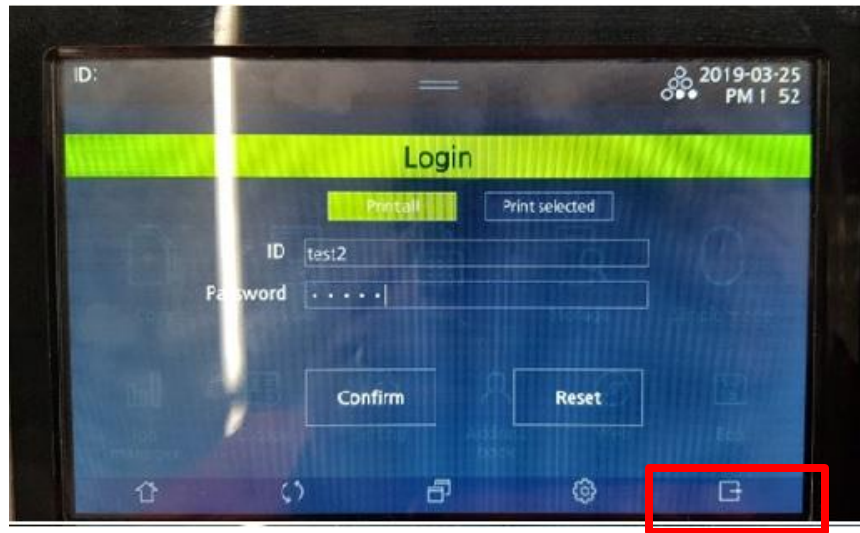


21. If you want to log out , press the red box in the bottom right corner



※ How to set the log out time

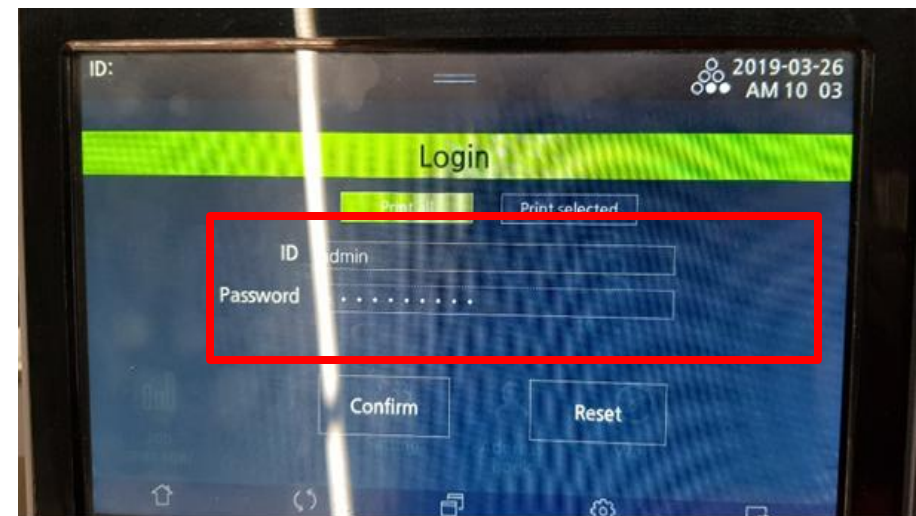

22. Input the ID/Password in the log-in window and press the confirm.
(ID: admin / Password: sindoh#123)

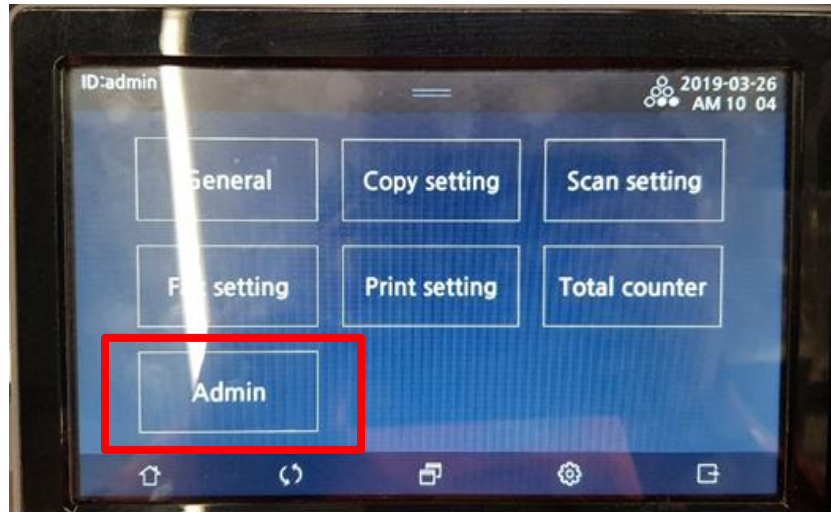

23. Press the setting → Admin
24. input the password.(defaults value: sindoh#123)

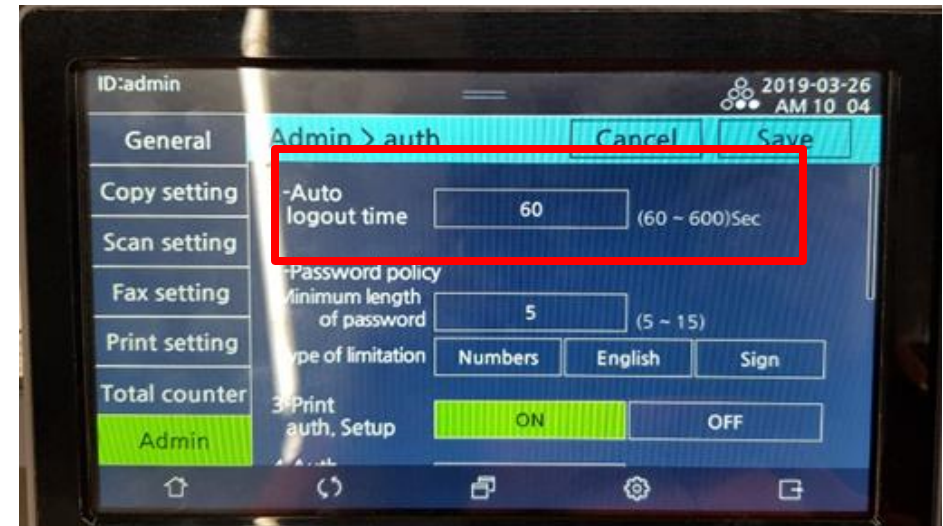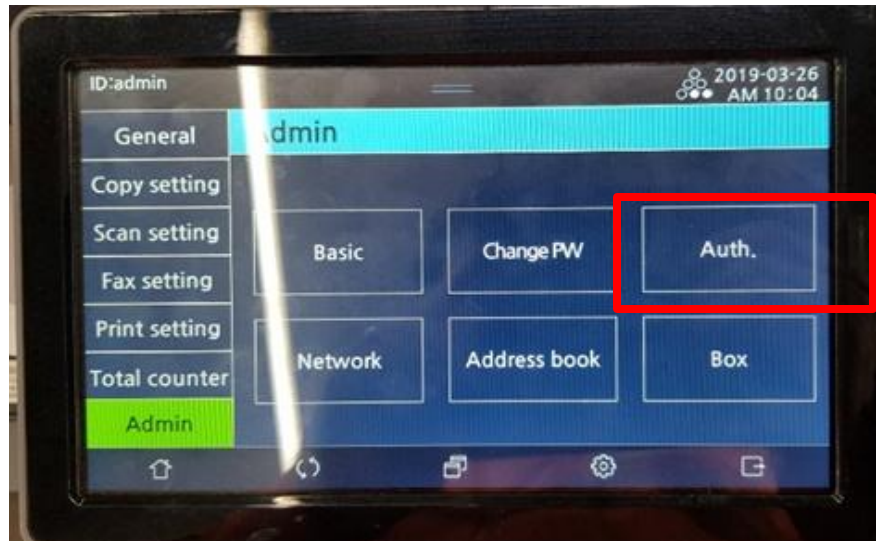

24. Press the Auth
25. Set the 1- Auto logout time.

Group Quota Count

The screenshot illustrates the configuration process for Group Quota Count. On the left, the 'Admin settings' menu is highlighted. The main configuration table shows 'Auth Setting' selected. On the right, the 'Auth Setting' configuration page is shown with the following settings:

Auth	: Auth off
Auth	: Device auth
User Auth	: on
Group Auth	: on
Group link	: on
Auth quator	: 10

1. Enter the web Monitor (enter the machine IP in web)
2. Do the login (defaults value: admin / sindoh#123)
3. Click the Admin setting and Auth Setting
4. Change the “Auth off” to “Device auth” in auth setting and User Auth is “on”
5. If you want to group in setted user, Group Auth and Group link is “on”
6. Click the “Save Setting”

※ If you are setted “10” in auth quator, Up to 10 users can be registered.

▶ Auth : Device auth


▶ User Auth : on

▶ Group Auth : on

▶ Group link : on

▶ Auth quator : 10

Save Settings



Address Book - Internet Explorer

https://10.16.102.168/eng/configuration/setting_auth.html

▶ Auth : Device auth


▶ User Auth : on

▶ Group Auth : on


▶ Group link : on

▶ Auth quator : 10

Save Settings




7. If you click to save setting, it showed the “setting success” , then click the “OK”
8. Then you will show “this setting will be applied after reboot.” , then click the “OK” then machine will reboot.

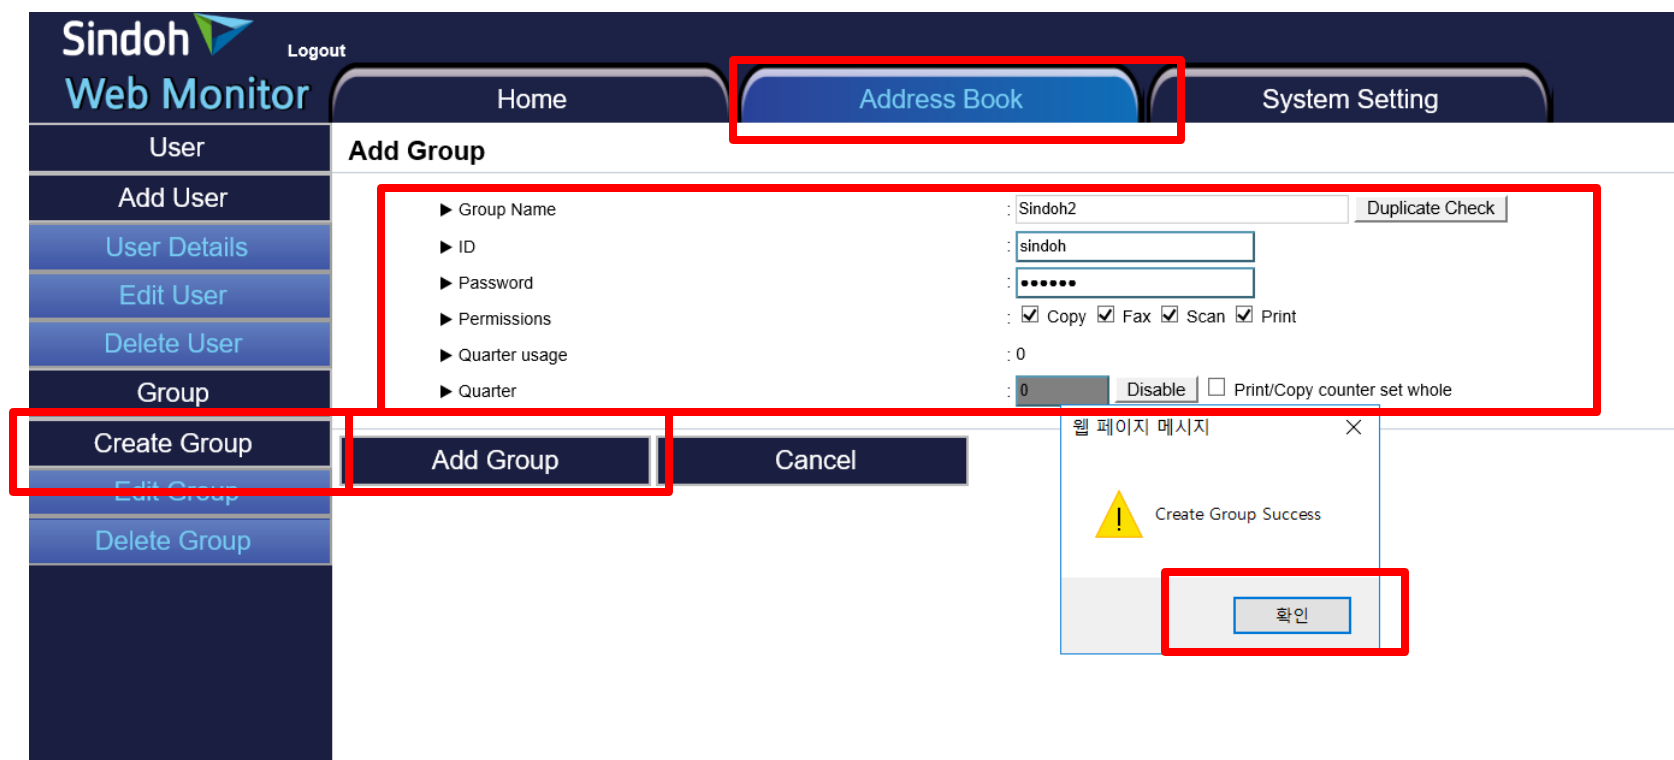

The screenshot shows the 'Sindoh Web Monitor' interface. The 'Address Book' tab is selected and highlighted with a red box. In the 'Add Group' form, the following fields are visible: 'Group Name' (Sindoh2), 'ID' (sindoh), 'Password' (masked with dots), 'Permissions' (Copy, Fax, Scan, Print all checked), 'Quarter usage' (0), and 'Quarter' (0). The 'Print/Counter set whole' checkbox is unchecked. The 'Create Group' button is highlighted with a red box. Below the form, the 'Add Group' and 'Cancel' buttons are visible. A success message dialog box titled '웹 페이지 메시지' (Web Page Message) is displayed, containing a yellow warning icon and the text 'Create Group Success'. The '확인' (OK) button in the dialog is also highlighted with a red box.


9. Enter the Address Book and press the Create Group.
10. Input the contents in Add Group.
(Group name/ ID/Password/Permission/quarter usage/quarter)
11. Press Add Group and the "OK"
(If you don't want to limit usage in group, press the "disable" in the quarter.)

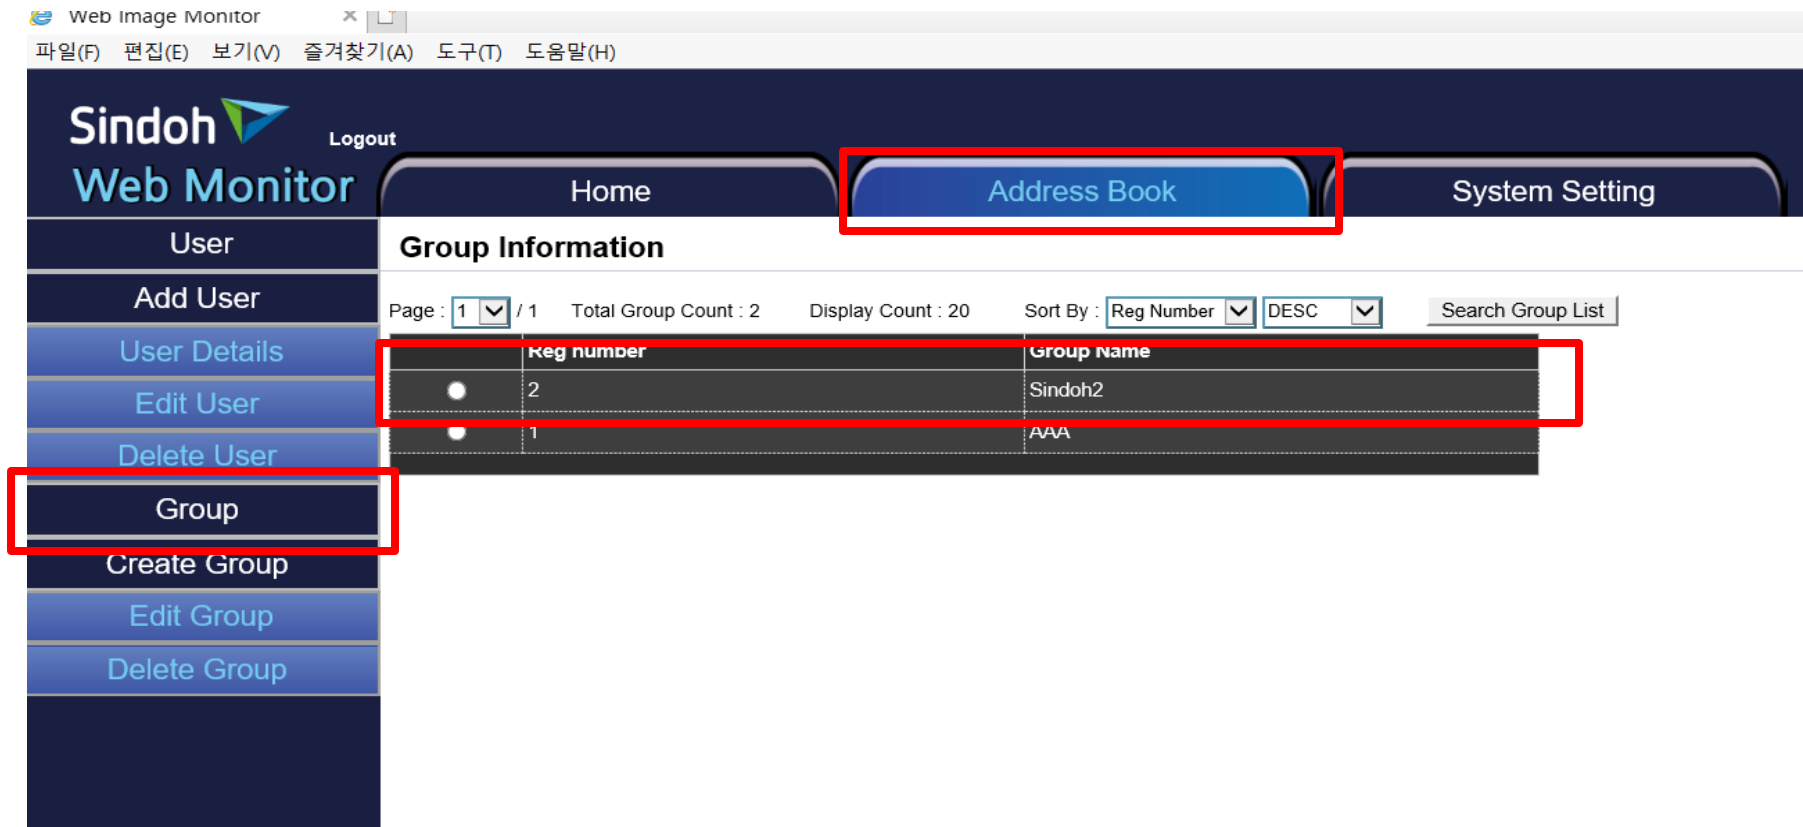

The screenshot shows the Sindoh Web Monitor interface. The top navigation bar includes 'Home', 'Address Book', and 'System Setting'. The 'Address Book' button is highlighted with a red box. Below the navigation bar, the 'Group Information' section is visible, showing a table with columns for 'Reg number' and 'Group name'. The table contains two rows: one with '2' and 'Sindoh2', and another with '1' and 'AAA'. The 'Group' button in the left sidebar is also highlighted with a red box.

Reg number	Group name
2	Sindoh2
1	AAA

12. Press the Group In Address Book. And then it will show the group you created.

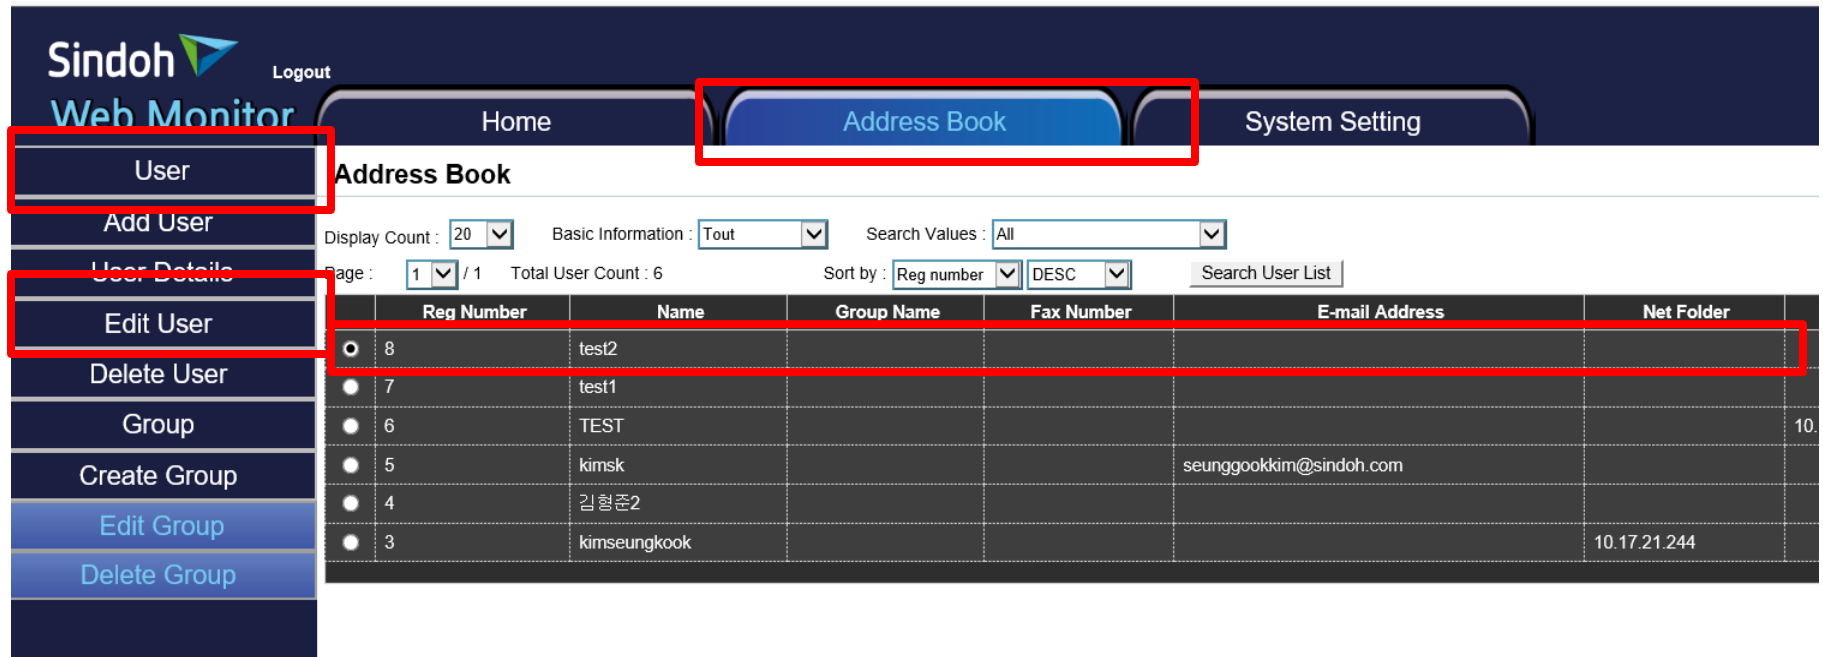

Address Book

Display Count : 20 Basic Information : Tout Search Values : All

Page : 1 / 1 Total User Count : 6 Sort by : Reg number DESC Search User List

	Reg Number	Name	Group Name	Fax Number	E-mail Address	Net Folder
<input checked="" type="radio"/>	8	test2				
<input type="radio"/>	7	test1				
<input type="radio"/>	6	TEST				10
<input type="radio"/>	5	kimsk			seunggookkim@sindoh.com	
<input type="radio"/>	4	김형준2				
<input type="radio"/>	3	kimseungkook				10.17.21.244

13. For adding the user in created group, press “Address Book” tap and press “user”.
14. Choice the user.
15. Press the Edit User.

Sindoh Web Monitor Logout

Home Address Book System Setting

Edit User : All of the password(if stored), invisible

Basic Information

- Name: test2
- User ID: test2
- Password: *****
- Permissions: Copy Fax Scan Print
- Quarter usage: 0 Clear counter usage
- Quarter: 0 Disable Print/Copy counter set whole

Group

- AAA
- Sindoh2

Group Auth

- Group Auth: sindoh

E-Mail

FTP

- FTP Server
- FTP Path
- FTP Port Number
- FTP ID
- FTP Password

WebDAV



- WebDAV Server
- WebDAV Path
- WebDAV Port Number
- WebDAV ID
- WebDAV Password

Fax

- Fax Number
- Speed Dial Number Duplicate Check

Edit Cancel

16. Check the wanted group in Group and choice after pressing the Group Auth
17. And click the Edit and “ok”

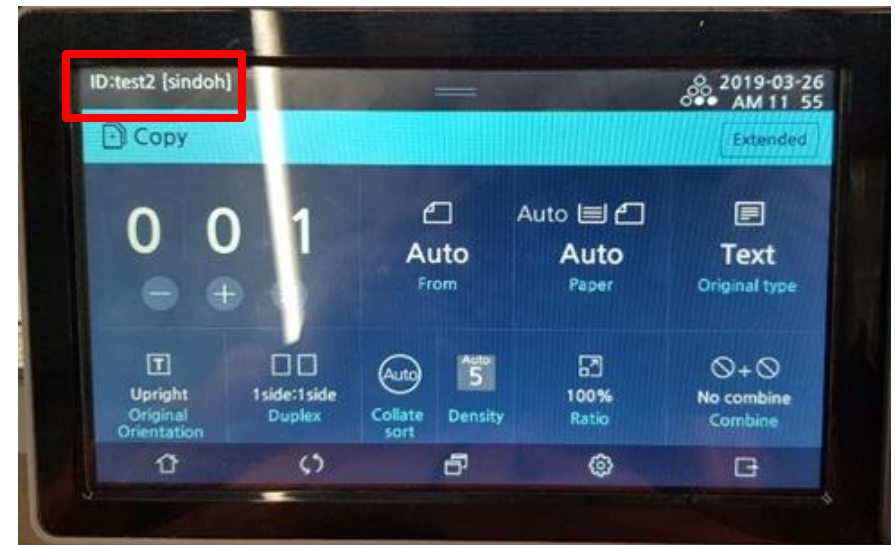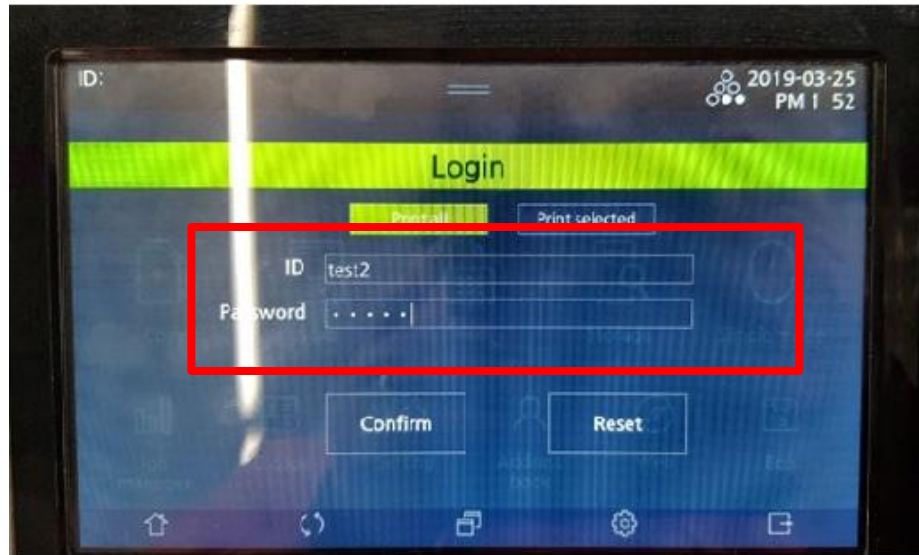

18 . Input the Individual user ID/Password in OP
and then individual will be showed user name and group name in top left.

The screenshot shows the Sindoh Web Monitor interface. On the left is a navigation menu with categories: General, Copy, Scan, Fax, Print, Network, and Paper. The main area displays 'Admin settings' with various configuration options. An Internet Explorer browser window is overlaid on top, displaying a table titled 'Group Quota Count Report Download(.xls)'. The table has the following data:

RegNo	ID	Copy/Print Quota	Copy/Print limit	Total Print Quota	Total Copy Quota	Total Scan Quota
1	sindoh1	0	0	0	0	0
2	sindoh	0	0	0	0	0

19. If Login user is copy/print/scan , it will be showed values for “Group Quota Count Report Download(.xls)” in Web Monitor.